



BOULDER™ EMBARKATION LADDER

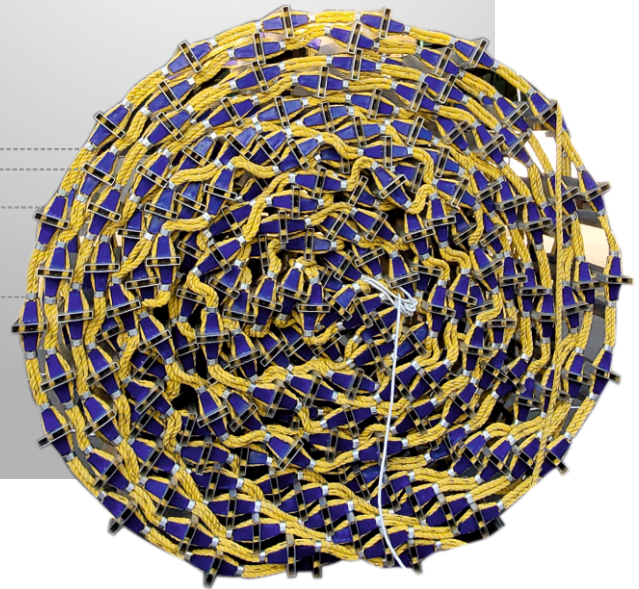


The SOLAS convention requires ladders at survival craft embarkation station to provide a safe means of climbing down the vessel's side when a vessel is at an excessive heel angle or abandoning when at sea adverse conditions.

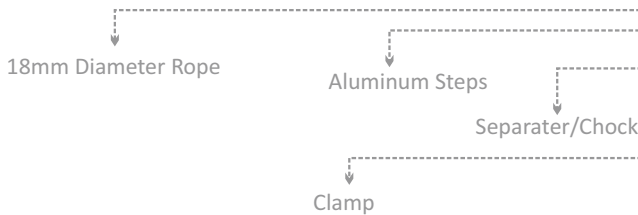

SPECIFICATIONS

Rope	PP Side Ropes, 18 mm Diameter each side, continuous with no joints
Qty	4 Nos
Length	11.5 M
Standard	SOLAS, LSA Code, ISO 5489
Certification	Lloyd's Register UK type approval ABS Load Test Certification
Distance Between Steps	300mm - 380 mm
Mounting Details	Two eye Splices at top of the ladder with non-corrosive metal, thimbles Material
Breaking Strength	24KN per Side Rope

Bottom View

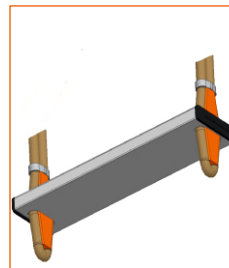

Side View



Mounting Details

